

Cosmo S 04 – Product Specification



Cosmo – The first totally round rope play structure

The innovative space structure offers exciting play options never before experienced. Cosmo is a whole new round of fun in play equipment: The first totally round rope play structure has arrived.

Apart from the basic system, Cosmo stands out due to its many freely selectable add-ons and diverse play activities. This gives the Cosmo an advantage over several rounds compared to conventional climbing frames.

In 2008 Cosmo received the prestigious "Red Dot" design award for excellent design quality.

Cosmo S 04 –At a glance.



Product Family:	Cosmo	Number of Foundations:	6 pc.
Item Number:	90.111.040	Concrete Volume C20/C25:	0.8 m³ (28.3 ft³)
Children's Age:	3	Number of skilled installers required:	3
Fall Height (DIN EN 1176):	1.83 m (6'-0")	Installation Time without foundation:	7 hours
Length x Width x Height:	5.7 m x 4.6 m x 2.9 m (18'-9" x 15'-1" x 9'-6")	Dimensions of largest part:	1.2 m x 0.8 m x 1.0 m (3'-11" x 2'-7" x 3'-3")
Protective Surfacing Area (DIN EN 1176):	9.4 m x 8.3 m	Weight of heaviest part:	110 kg (242.5 lbs)
Protective Surfacing Area (ASTM 1487):	9.4 m x 8.3 m (30'-9" x 27'-1")	Shipping Volume:	3.4 m³ (120.1 ft³)
Minimum space required DIN EN 1176:	46.2 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	53.1 m² (571.6 sf)	Certificate according to DIN EN 1176:	No.: Z2 15 12 10256 245 TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Cosmo S 04 – Product Specification

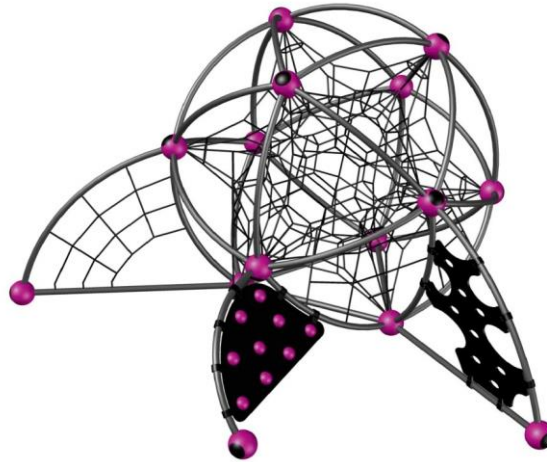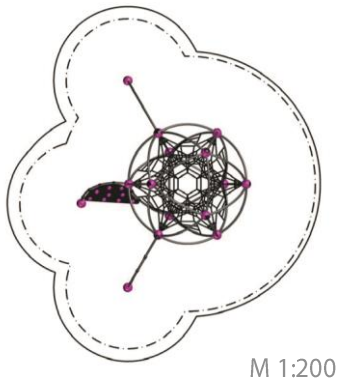

Technical Data.

The following text can also be used for tenders.

- Cosmo S
- Net wall
- Climbing wall
- Climbing ramp

Tube framework:

Curved stainless steel tubes; Ø 60.3 mm (2 3/8")

Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); Ø 16 mm (5/8")

Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

Net wall:

Made of U-Rope, mesh size minimum 250 x 250 mm (9-4/5" x 9-4/5"); rope crossing points localized with durable, drop forged aluminum-ball-knots, net mounted with aluminum tube clamps on stainless steel tubes (net ramp and net wall), Ø 2 3/8" (60.3 mm); grounded with Framework-aluminum ball connector, Ø 9 13/16" (250 mm) and foundation-tube

Climbing wall:

Mold-shaped HDPE-panel, 3/4" (19 mm) thickness, rounded edges; mounted with 7 aluminum plate clamps on stainless steel tubes, Ø 2 3/8" (60.3 mm); grounded with Framework-aluminum ball connector, Ø 9 13/16" (250 mm) and foundation-tube

Climbing ramp:

Mold-shaped HDPE-panel, 19 mm (3/4") thickness, rounded edged; equipped with 14 powdercoated steel-hemispheres, and angle mounted with 9 aluminum plate clamps on stainless steel tubes, Ø 60.3 mm (2 3/8"), wall thickness 2.9 mm; grounded with Framework-aluminum ball connector, Ø 250 mm (9-13/16") and foundation-tube Ø 60,3 mm (2 3/8")


Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Revision: March 2016

Page 2

