


Arch Swing – Product Specification



Arch Swing

Elegant and practical! The Arch Swing, which is connected to the bended post, allows swing fun for many children at the same time and convinces with its elegant design.

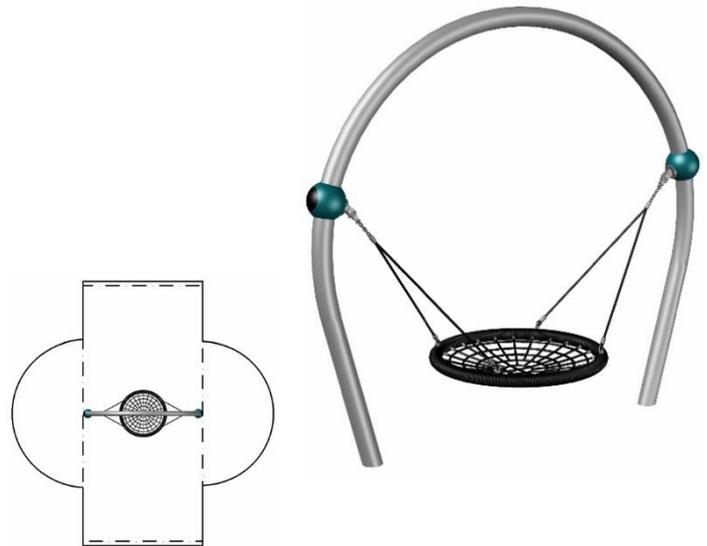

Arch Swing – at a glance.

Product Family:	Playpoints	Number of Foundations:	2 pc.
Item Number:	90.260.534	Concrete Volume C20/C25:	1.2 m³ (43 ft³)
Children's Age:	5+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.7 m (5'-7")	Installation Time without foundation:	3 hours
Length x Width x Height:	3.2 m x 1.3 m x 3.0 m (10'-6" x 4'-4" x 9'-10")	Dimensions of largest part:	3.3 m x 1.2 m x 0.2 m (10'-10" x 4'-0" x 0'-8")
Protective Surfacing Area (DIN EN 1176):	6.8 m x 3.2 m	Weight of the heaviest part:	65 kg (144 lbs)
Protective Surfacing Area (ASTM 1487):	7.0 m x 6.9 m (23'-0" x 22'-8")	Shipping Volume:	2.8 m³ (99 ft³)
Minimum space required DIN EN 1176:	21.5 m²	Shipping Weight:	240 kg (lbs)
Minimum space required ASTM 1487:	33.2 m² (358 ft²)	Spare part guarantee:	Lifelong

Technical Data.

The following text can also be used for tenders.

Swing seat:

Nest swing seat made of galvanized steel tube ring, encased with shock absorbing material and wrapped with a shock-absorbing fiber rope, close-knit network of soft steel wire, steel wire strands which are covered with braided polyester yarns.
Connection parts: Stainless steel V2A

Nodes:

Frameworkx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process; securely closed with durable EPDM- caps

Posts:

Steel pipes Ø 133 mm (5 ¼"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process

suspension:

U-Rope®-round strand ropes with galvanized steel cores, external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene); Ø 16 mm, connected to universal joint with steel chains


Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

