**Liane - Product Specification** 



HodgePodge - A variety of study and durable sport and play elements

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Be like Tarzan in the jungle! Lianas are rocking ropes attached to curved posts. The task is to swing from stump to stump on the ropes without falling into the sand. Especially for older children, this offers a great challenge!

# Liane – At a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

HodgePodge 95.190.605 5+ 2.16 m (7'-1") 5.0 m x 4.7 m x 3.1 m (16'-5" x 15'-5" x 10'-2")

8.0 m x 8.5 m 8.7 m x 8.6 m (28'-7" x 28'-3")

48,4 m<sup>2</sup> 46,0 m<sup>2</sup> (496 ft<sup>2</sup>) Number of Foundations: Concrete Volume C20/C25:

Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Transportvolumen:

Spare part guarantee:

Ausgabe: December 2018

5 pc

3,0 m³ (106 ft³)

4 hours

4 nours

4.0 m x 0.6 m x 0.2 m (7'-11" x 7'-11" x 7'-11")

80 kg (177 lbs) Upon request


Lifelong



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33



# **Liane - Product Specification**

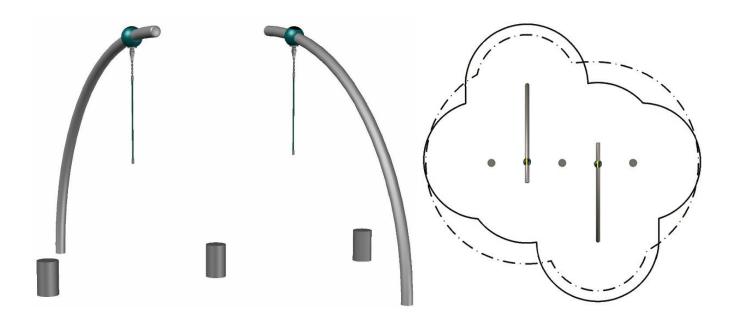

### **Technical Data.**

The following text can also be used for tenders.

### Steel posts:

Bended Terranos® steel posts with individual round cast aluminum post tops; Ø 133 mm (5 ¼"); wall thickness 7.1 mm (1/4"); anti-corrosion treatment and color finish: sandblasting with offshore anti-corrosion powder coating treatment and solvent-free-/ epoxy-/ polyester color finish powder coating

#### Nodes

The cardan swing joint is connected to Frameworx®- aluminum ball connectors,  $\emptyset$  250 mm (9'-13/16"), anti-corrosion treatment and color finish: sandblasting with offshore anti-corrosion powder coating treatment and solvent-free-/ epoxy-/ polyester color finish powder coating, securely closed with durable EPDM-caps and pivoted with needle bearings



#### Rubber palisade:

Rubber palisade, Ø 250 mm (9'-13/16"), groove with circumferential chamfer. Made of permanently elastic, PUR-bound rubber granulate with steel anchor

## Liane:

U-Rope®-Round strand rope with stranded cores and rope core made of galvanized wires, outer strands encased in highly abrasion-resistant and highly UV-resistant polyester yarn (not polypropylene); Ropes Ø 18 mm (11/16 "); Connected to stainless steel chain and cardan swing joint



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33



info@berliner-seilfabrik.com www.berliner-seilfabrik.com