

# HodgePodge

## Elbow Swing Product Specifications



Published: December 2020


### Elbow Swing

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Simple but elegant. With its reduced shape the new Elbow Swing radiates lightness – just as the children feel.

## 95.190.484

 Product Family	<b>HodgePodge</b>
 Length x Width x Height (m) Length x Width x Height ("'-")	<b>0,2 x 2,6 x 2,5</b> <b>0-6 x 8-7 x 8-0</b>
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	<b>7,8 x 1,8</b> <b>9,2 x 6,3</b> <b>30-3 x 20-7</b>
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	<b>1,33</b> <b>7-7</b>
 Age	<b>3</b>
 Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>13,5</b> <b>336,6</b>
 Number of Foundations	<b>1</b>
 Concrete Volume C20/C25 (m <sup>3</sup> )	<b>1,26</b>
 Number of skilled Installers required	<b>2</b>
 Installation Time without Foundation	<b>2 hours</b>
 Dimensions of largest Part (m)	<b>4,4 x 1,4 x 0,2</b>
 Weight of heaviest Part (kg)	<b>170</b>
 Shipping Volume (m <sup>3</sup> )	<b>On request</b>
 Total Weight (kg)	<b>On request</b>
 Spare Part Guarantee	<b>Lifelong</b>

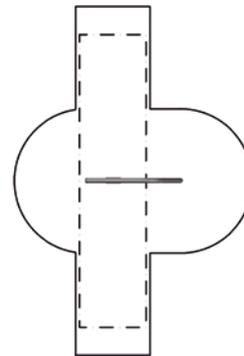

## Technical Data

Technical changes are reserved. The following text can also be used for tenders.

### Posts:

The bent steel posts with a diameter of  $\varnothing$  133 mm (5 1/4") and a wall thicknesses of 7,1 mm (1/4") are thermally galvanised to protect against corrosion and powder-coated in colour using a solvent-free epoxy/ polyester/ process. In addition they are watertight sealed with rounded aluminium tops.

### Swing Seat & Suspension:

The black rubber safety swing seat is connected to the swing hangers by stainless steel chains and is needle bearing mounted with stainless steel swivels.