Triple Boo- Product Specification



Triple Boo

An three dimensional net provides the ideal basis for every climber. In this Greenville Rope-play house it goes up through an 5 meter high spatial net (rope diameter Ø18mm) equipped with the AstemTT net tensioning system.

Triple Boo - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Greenville 90.280.000.3

2.94 m (9'-8")

3.1 m x 3.0 m x 5.4 m (10'-1" x 9'-8" x 13'-0") 7.99 m x 7.90 m

6.73 m x 6.59 m (22'-1" x 21'-8")

49.67 m² 34.77 m² (375 sf) Number of Foundations: Concrete Volume C20/C25:

Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: Gross weight

Certificate according to DIN EN 1176:

5 pc.

0.75 m³ (26.49 ft³)

1.4 m x 1.4 m x 0.04 m (4'-8" x 4'-8" x 0'-2")

40 kg (88.2 lbs) 6.0 m³

Lifelong

12 hours

1200 kg (2646 lbs) No.: Z2 16 01 10256 253

TÜV Product Service







Berliner Seilfabrik GmbH & Co. Lengeder Straße 2/4 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com www.berliner-seilfabrik.com

Triple Boo- Product Specification

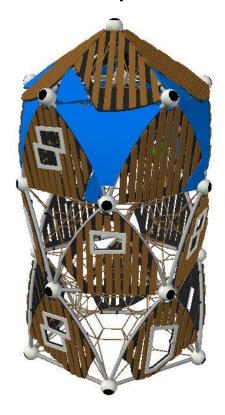

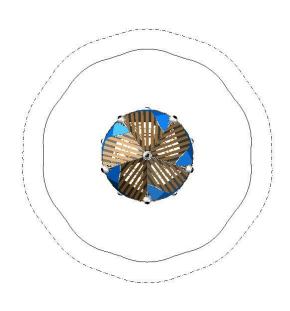

Technical Data.

The following text can also be used for tenders.

Tube framework:

A combination of straight and bended stainless steel Frameworx-®tubes, \varnothing 60,3 m(2 3/8"), material AISI304 (DIN 1.4301). The tubes are connected to build a space framework with a triangular footprint

Nodes:

Frameworx-aluminum ball connectors; Ø 250 mm (9'-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires, external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene). Rope-diameter Ø 18mm (11/16")

Special netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings, joint-ferrule, connecting-clamps and barrel-ferrule (no plastic connections); in situreplaceable rope strands

Bamboo panels:

Bamboo strips 90 mm, (3'-1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33



info@berliner-seilfabrik.com
www.berliner-seilfabrik.com Revision: May 2016 Page 2