

Geos

Geoball.05 Product Specification



Published: November 2019

















Geoball.05



These structures are ideal for climbing on the inside or outside. The Geos offer enough space on the inside to play soccer or as a safe play area with plenty of room for hammocks or ladders. The pure carbon molecule C₆₀ consists of 12, 5 and 20 hexagonal carbon rings with a total of 60 atoms – one at each corner: the shape of a soccer ball. Geos are constructed according to the same principle. The Geos can be varied in diameter by changing

the tube lengths. Three types are available for different dome sizes.

The Geoball.05 is a real play circus. The circus made of nets surrounds the ring of hammocks, hand-over-hand-loop-ropes and climbing ropes. The net funnel in the centre allows easy access to the top.

95.130.205

 Product Family	Geos
 Length x Width x Height (m) Length x Width x Height ("'-")	7,3 x 7,3 x 3,0 24-0 x 23-10 x 9-11
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	10,3 x 10,3 11,0 x 11,0 36-0 x 35-10
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	2,76 9-1
 Age	5
 Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	82,4 1005,4
 Number of Foundations	5
 Concrete Volume C20/C25 (m ³)	1,2
 Number of skilled Installers required	2
 Installation Time without Foundation	20 hours
 Dimensions of largest Part (m)	1,2 x 0,8 x 0,3
 Weight of heaviest Part (kg)	50
 Shipping Volume (m ³)	9,2
 Total Weight (kg)	On request
 Spare Part Guarantee	Lifelong
 Certified acc. to EN 1176	Z2 18 04 10256 272

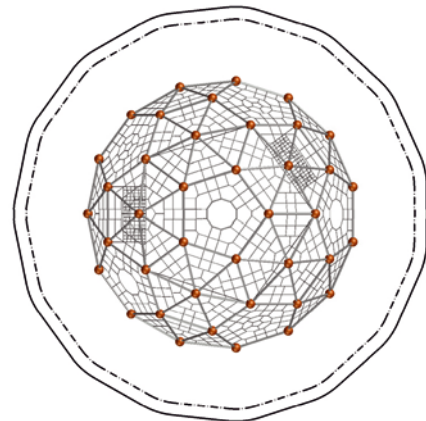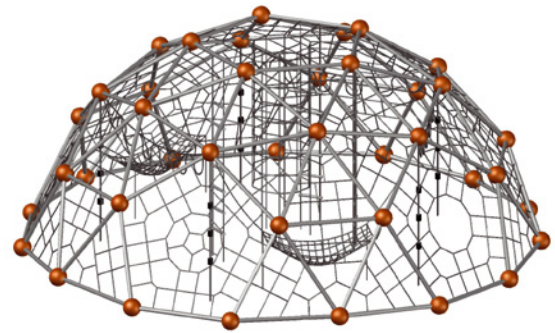

Technical Data

The following text can also be used for tenders.

Included Products:

- Hammock
- Climbing rope
- Hand over hand loop rope
- Rope ladder

Tubes:

Framework®-steel pipes with a diameter of Ø 60,3 mm (2 3/8"), anticorrosion treatment and colour finish: sandblasting and epoxy-/ polyester-process.

Balls:

Framework®-aluminium ball connectors with a diameter of Ø 250 mm (9 13/16"). Anticorrosion treatment and colour finish: sandblasting and epoxy-/ polyester-process; secured with durable ebonite caps.

Ropes:

U-Rope®-round strand ropes with galvanised steel cores, Ø 16 mm (5/8"); external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene).

Net:

Rope crossing points localised with hydraulically pressed ball knots comprised of corrosion resistant forged alloyed aluminium (no plastic).

Hammock:

Hammock net with mesh width 100 x 130 mm (3 15/16" x 5 1/8") and rope crossing points with corrosion-resistant, drop-forged aluminium parts (ball joints), hydraulically pressed.

Climbing Rope:

All ropes with a diameter of Ø 18 mm (11/16"). The vertical ropes have worked-in ebonite cylinders with a distance of 250-300 mm (9 13/16" to 11 13/16").

Hand-Over-Hand Loop Rope:

Rope diameter Ø 18 mm (11/16"); length per loop approx. 110 mm (4 5/16") and a clear diameter. The loops are durable fixed to a horizontal rope with aluminium ferrules.

Rope Ladder:

Rope diameter Ø 16 mm (5/8"), black polyamide rungs with a diameter of Ø 40 mm (1 9/16").